

ECOSOFT ROBUST 1500 REVERSE OSMOSIS FILTER

APPLICATION: Cafes, hotels, offices, schools, laboratories, dental offices, private homes, etc.



KEY FEATURES

- Flow rate 100 liters per hour
- Made to run 20 hours per hour
- Recovery rate 60% - filter is economical and environmentally-friendly
- Ready-to-install design with pre-installed cartridges and membrane element
- Built-in pressure gauges indicating pump conditions
- CE marked and confirmed to be safe by EC New Approach Directives

SPECIFICATION

Code	Flow capacity ¹ , LPH (GPH)	Water consumption, LPH (GPH)	Power supply	Power consumption, kW (hp)	Dimensions, H x W x D, mm (in)
ROBUST1500ECO	90-100 (24-26.5)	150-170 (40-45)	100-240 V, 50-60 Hz	0.12 0.16	417 x 367 x 297 (16.4 x 14.4 x 11.7)

¹At 25 °C feed water temperature, TDS 1000 ppm

SYSTEM COMPONENTS:

- Assembled filter
- Pre-filter and post-filter
- Reverse osmosis membrane
- Drain saddle
- Installation fitting set
- Set of tubes
- Service wrenches

FILTRATION STAGES:

- 5 micron PP sediment filter 2.5"×10"
- CTO carbon pre-filter 2.5"×10"
- Ecosoft membrane element (1 pc.) 3.0"×12"
- CTO carbon post-filter 2.5"×10"


ECOSOFT ROBUST 1500 REVERSE OSMOSIS FILTER

Code	Product	Membrane	Pieces on pallet
ROBUST1500ECO	Direct flow RO Ecosoft ROburst 1500	1 x CSV3012500ECO	24

ROBUST 1500 REPLACEMENT FILTERS

Code	Description	Replacement/ months	Quantity, pcs
CHV3ECO	Ecosoft advanced pack of replacement filters 1-2-3	3	1
CSV3012500ECO	Ecosoft 500 GPD membrane element	12	1

HOW IT WORKS?

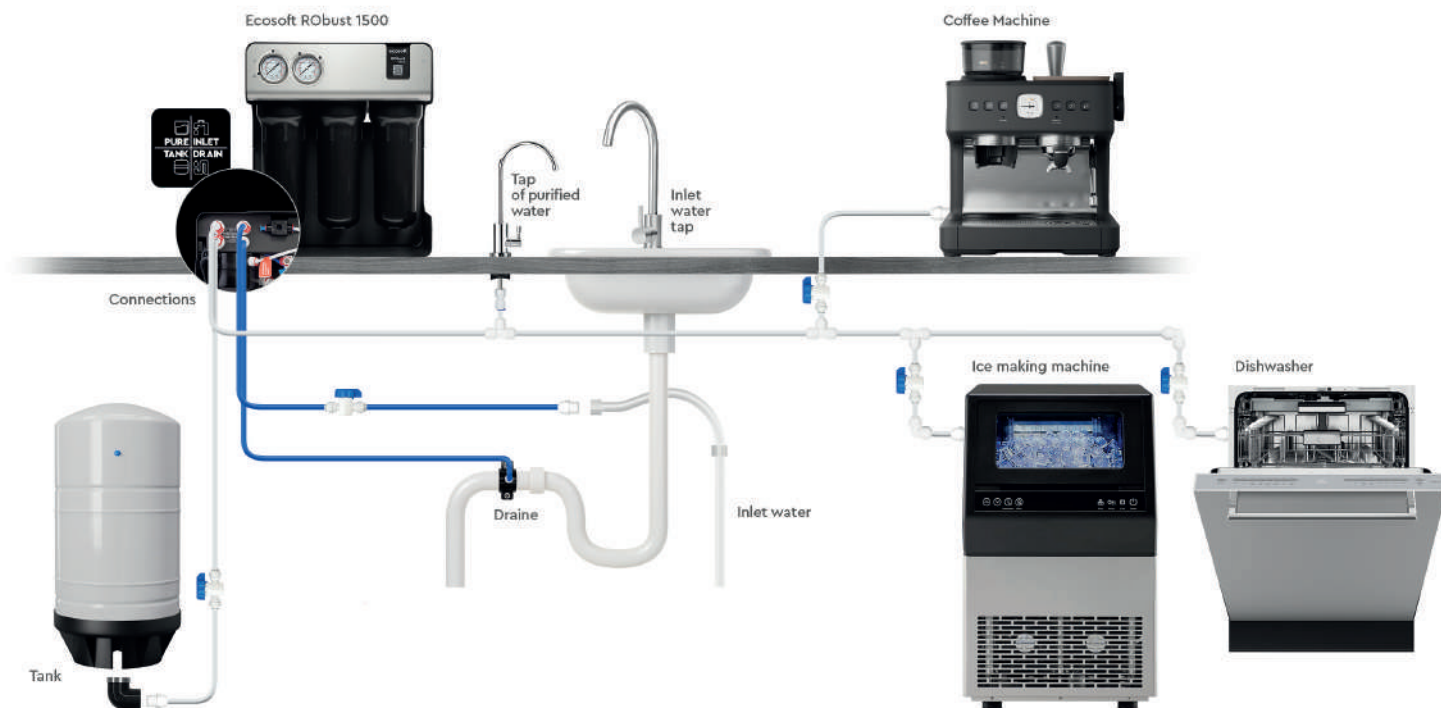

DENTAL CLINICS, LABORATORIES

